

## Screw plug - PROT-M12 FB - 1555538


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



M12 high-grade steel screw plug, for unoccupied M12 sockets of the sensor/actuator cables, boxes and flush-type connectors for the food industry



### Key Commercial Data

Packing unit	5 STK
Minimum order quantity	5 STK
GTIN	 4 046356 170543
GTIN	4046356170543

### Technical data

#### Ambient conditions

Degree of protection	IP65
	IP67
	IP69K

#### General

Note	Use up to max. 48 V AC and 60 V DC
	Not suitable for M12 sockets with K, L, or M coding
Torque	0.4 Nm

#### Material

Material	Stainless steel V4A
----------	---------------------


#### Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

### Drawings

## Screw plug - PROT-M12 FB - 1555538

Dimensional drawing

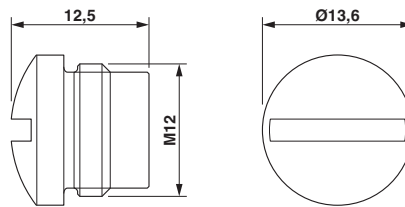

---

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>