




## PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
-	DCN 38042	03/11	STW		
Α	DCN 41508	07/15	STW		







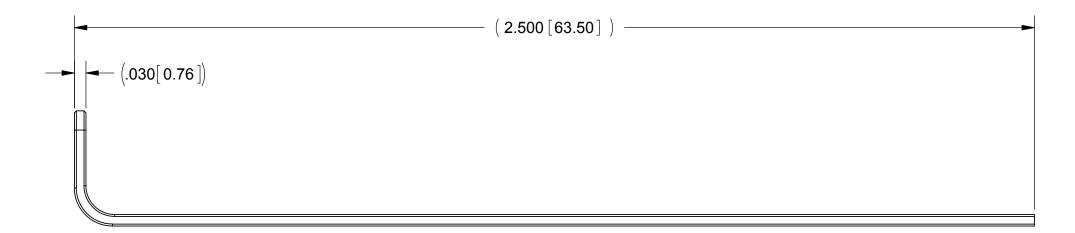

## **MATERIAL**:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

## FINISH:

PASSIVATED PER AMS-2700

DIMENSIONS ARE IN INCHES TOLERANCES:
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005
INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0′ X°X′ ±15′  DECIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .004 T.I.R. 7) REMOVE ALL BURRS		
THIRD ANGLE PROJECTION	DRAWN:	FED 03/01/11	
	CHECKED:	STW 03/01/11	
\ \P\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \	APPROVED:	STW 03/01/11	

UNLESS OTHERWISE SPECIFIED



SMPM FEMALE CABLE **REMOVAL TOOL** 

	95077	DWG.	NO.	500-32	-010
SCALE: 4:1					SHEET 10